

- intumescent collars to be provided where pipes ducts and services pass thru walls, ceilings and
- all vent ducts encase as described
- No beams are supported on Chimney breast,brickwork.
- provide engineered board wooden flooring to all areas except kitchen and bathrooms, tiled floors to kitchen and bathrooms, bathrooms to be fully tiled, all tiles and floor finishes to clients spec

provide 75mm mdf architraves and 200mm mdf skirtings to all areas other than bathrooms


decorations to include all filling and preparation work, ceilings to be in 3 coat white emulsion, walls in 3 coat emulsion, client to spec colour, all woodwork in 1 coat primer, 2 undercoats and 2 top coats of satin wood, client to spec colour
- provide new double glazed timber double hung sash window as details
- provide insulation as detail
- condensing combination boiler located as shown, provide convector radiators suitable sized to all rooms and positioned under windows where possible, all radiators with room stats, provide c02 alarms and provide certificates on completion wet system heated towell rail to bathrooms
- electrical consumer unit, to be positioned as shown, provide a minimum of 4 double power outputs per room and an additional 4 double outputs for each kitchen, provide all required spurs for appliances, allow for LED downlighters to habitable rooms, hallways and kitchens, allow for 2 wall lights to Lounge, provide TV. telephone points and internet connections to all rooms

new dpc and dpm to be lapped to extg, if no dpc's exist provide new dpc via chemical injection to be undertaken by specialist insurance backed contractor

No beams are supported on Chimney breast,brickwork.

all vent ducts encase as described

intumescent collars to be provided where pipes ducts and services pass thru walls, ceilings and

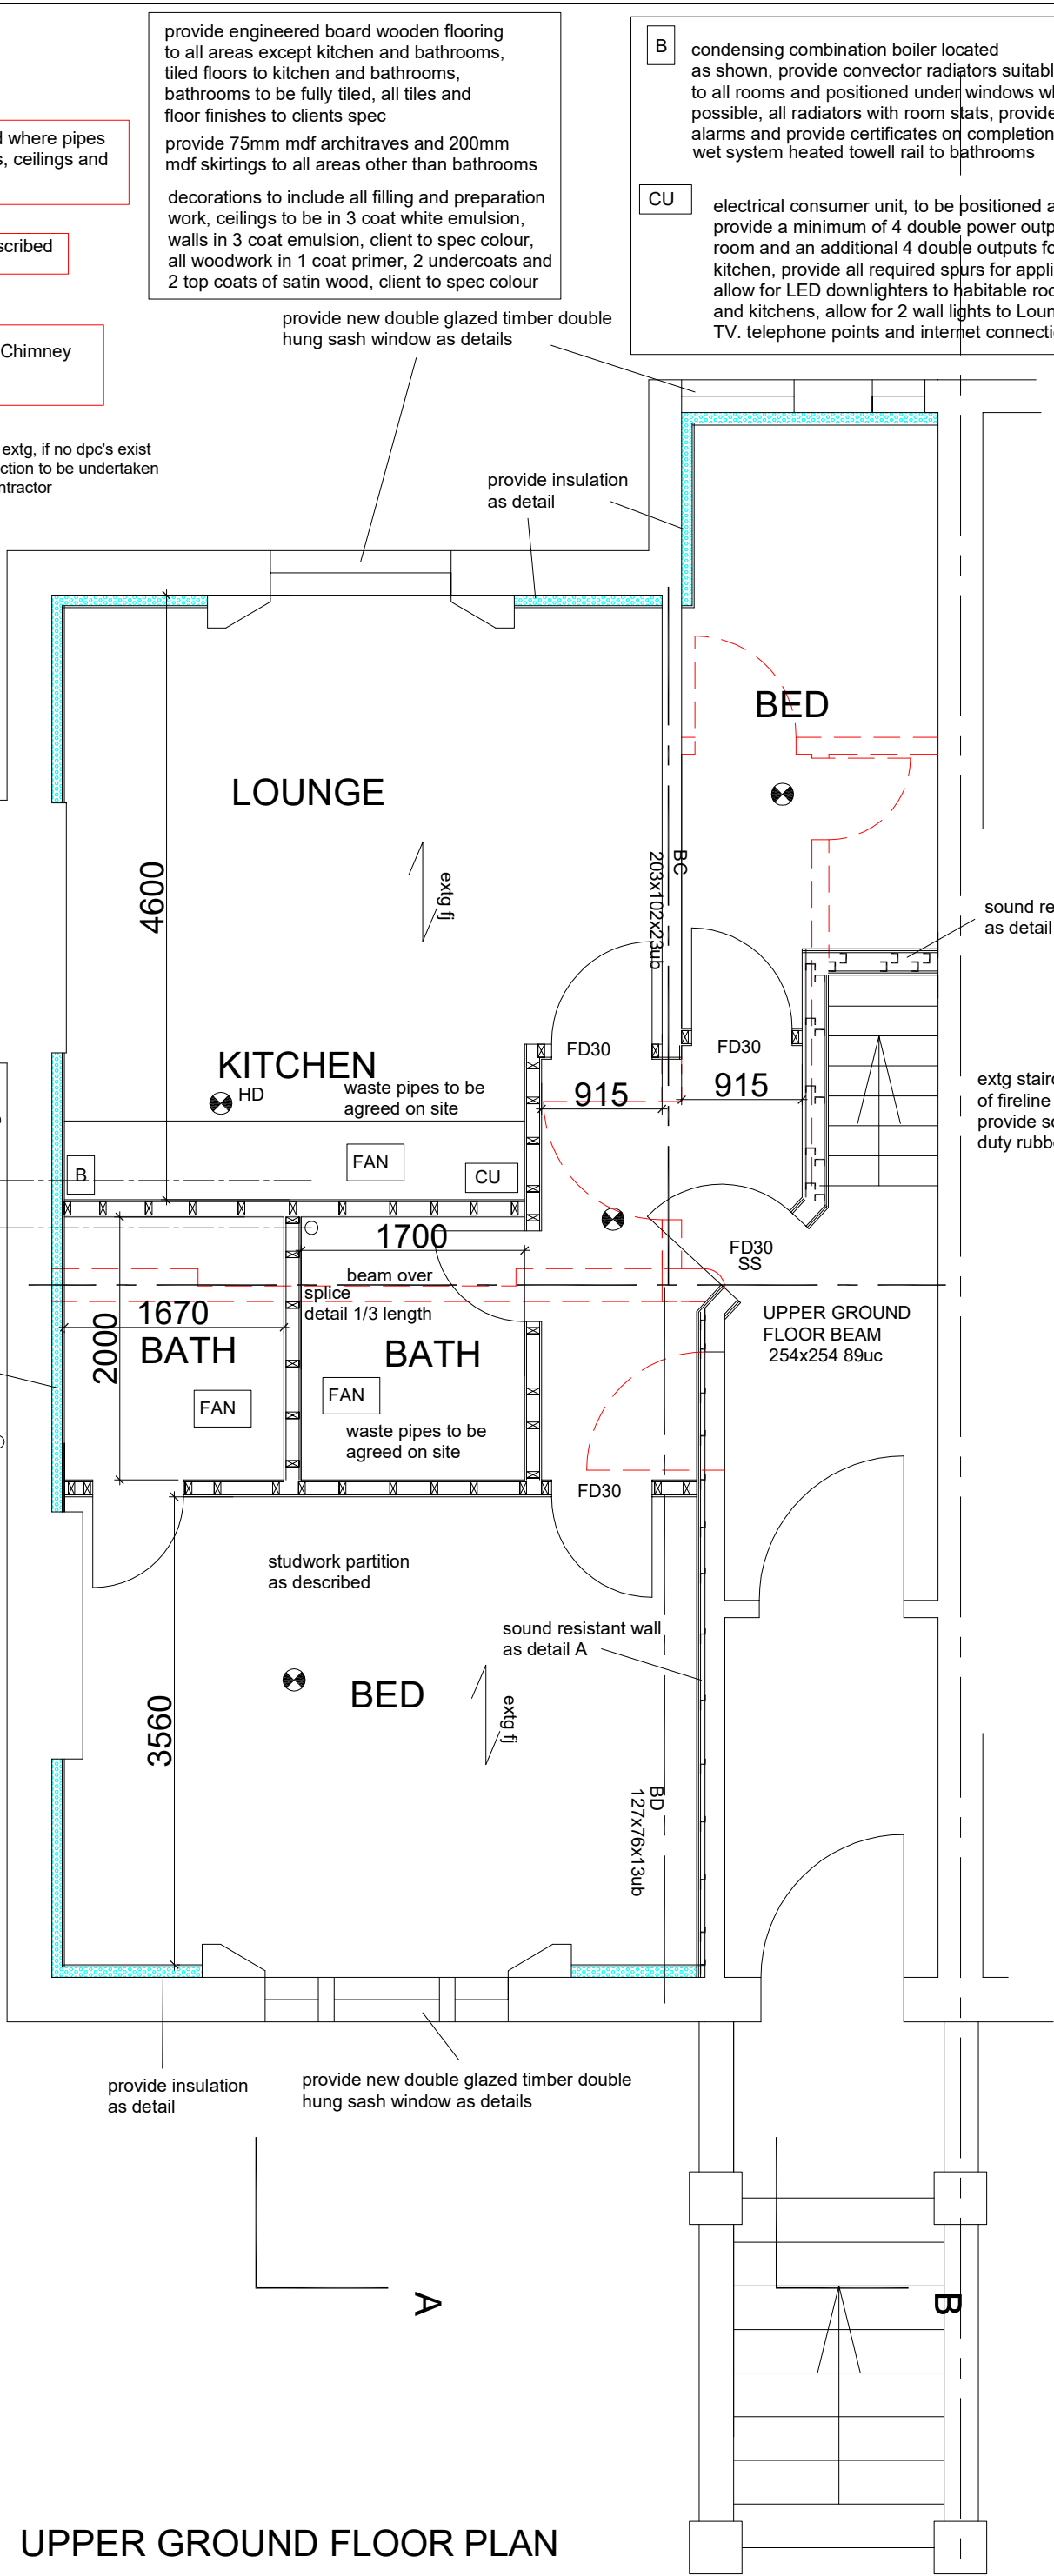

UPPER GROUND FLOOR PLAN

TITLE	PROPOSED DRAWINGS	ADDRESS	95 MALVERN ROAD LONDON. NW6
CLIENT	Mr. C. NORMAN	SCALE	1:50 @ A3
DRAWING NO.	190328/11	DATE	MARCH 2019
REV.	A		