Floor Slab
Existing floor slabs are adequate for the proposed layouts. However fit 15mm moisture resistant Caper Board or similar to all floors from the top of the steps through the clinical areas. To allow electrical service to run to dental chairs. The entrance area/staff area does not need the above mentioned board. Floor can be covered with alternative board PM to be advised.
NOTE-If air and water is needed at the dental chair box the floor slab will need additional 25x38mm battening secured to each surgery, please cost a separate amount for this.

Internal stud walls marked in orange.
Ground and lower ground floor walls in 70mm metal stud work at 400mm crs. For fire protection the walls must extend from floor to concrete ceiling above and be boarded both sides up to the said concrete ceiling.
Stud walls to dental and GP surgeries to be fitted with 50mm sound quilt & 12.5mm soundboard on both sides.
No electrical sockets are to be fitted back to back.
X-Ray shielding as per the drawings.
To walls with red line provide code 3 lead sheet fitted that must pass shadow test if required.
NOTE It is intended to salvage this lead sheet for the move in 9 months time. The viewing panel to the scanner must be fitted with leaded glass. All door stops and and linings must also be fitted with lead.

All new MF ceilings throughout are to be suspended grid type fixed to the floor slab above, to allow for service installation.
NOTE It is intended to salvage the said grid ceiling for the move in 9 months time.
All ceiling to be finished with 600x600 ceiling tiles. Suggest height to be under lowest soil pipe feeding apartments above.

A full DOC M pack will be fitted in accordance with Diagrams 18 AND 19 M1/M3 (Sanitary Accommodation in Buildings Other than Dwellings). Handrails etc to be in stainless steel-these will be reused in the move.

Protection from Impact
Glazing to any doors, side panels, screens and windows within 300mm of doors and windows within 800mm of floors as defined in AD Part K are to be fitted with safety glazing and complies with Class 3 of BS EN12600 or Class C of BS 6206. Supply and fit manifestations to existing windows (or film same to head height) in accordance with Part M-at a minimum of 50-70mm dots at 800mm and 1500mm off floor.

Any structural elements exposed to be protected to 60 minutes with 2 layers 12.5mm plasterboard and 3mm skim finish.
Cavity fire barriers are to be provided in line with all party walls & party floors. Line of fire resistance to the floor structure above.
All rooms to be provided with 30 minutes fire protected hallways to facilitate escape with FD30 doors except where noted on the drawings.
Compartments will achieve 60 minute fire rating as floors are concrete additionally ceilings will be in ceiling tiles.
All sub compartments will achieve 30 minute fire rating with the use of 12.5 mm plasterboard.

New architraves and skirting to be 50mm and 100mm bevelled edge or other contemporary section.

Dot and dab 12.5mm plasterboard to all walls marked in green.

Materials should generally be in accordance with BS8000 and other accepted good practice.
Test certificates for intumescent materials, emergency lighting, fire alarms, and electrical installation/boiler will be required to be submitted prior to the issue of the Final Certificate.
Walls and ceilings to have a class O surface spread

Sanitary Pipework to be as B Regs part H
Generally where practical back to existing or proposed gully/drains. When having to extend the following should be followed.
Basin-1.7m max for 32mm pipe and 3m for 40mm pipe.
WC-6m length of 100mm for single WC
All sanitary fittings to be provided with deep sealed traps and fall of pipes to be a minimum of 1:40. See service drawing.

Fire Safety
The new fire alarm layout is to cover the ground floor as per the proposed plans.
Smoke detectors to be mains operated, located minimum of 300mm from light fittings & walls. System to be installed & commissioned in accordance with BS 5839.1-2002, commissioning certificates to be provided on completion of this work.
Fire exit sign with running man over door in accordance with BS 5499-1:2002 & Health & Safety (Safety signs & signals) Regulations 1996.
Emergency lighting to be installed & commissioned in accordance with BS 5266-1:2005. Test & commissioning certificates to be provided on completion of this work.
A fire risk assessment will be prepared by a responsible person nominated by the client when the practice is operational. A complete file on fire safety will be given to the client on completion

EMERGENCY LIGHTING SYSTEM

Emergency lighting all in accordance with BS5266 Part 2
2005.Commissioning certificates to be provided on completion.

New 30 minutes fire doors indicated by FD30S. generally provided with 3 steel hinges, smoke seals, over head door closer, lever handle, if locks are provided they are to have a thumb turn on the inside.

Linings to walls and ceilings in the circulation areas are to retain Class 0 surface spread of flame rating. Linings to walls and ceilings in individual rooms to be provided with class 1 surface spread of flame rating.

New lighting, electrics, and plumbing as per Service Drawing.

Fire protection to floors as existing and generally 60 minutes fire resistance to be maintained.
Any new services penetrating ceiling to be provided with intumescent collars to maintain 60 minutes fire resistance to compartment ceilings.

Electrics

Electrics to be installed by a competent person all in accordance with BS7671:2008 Part P. Commissioning certificate and test commission certificates to be provided no later than 30 days after completion of work.

Ironmongery Packs Satin Stainless Steel

Pack B: Secure Fire Doors 30s.
1.5 pairs hinges with roller bearings (fire rated)
1 door handle set.
1 euro mortice lock with thumb turn to inside
1 door closer
Intumercent smoke seals.
2 FDXS fire safety signs
1 floor mounted door stop
Buffer rubber strips to door stops (to stop door banging)

Pack D: W.C. Doors:
1.5 pairs hinges with roller bearings
1 Privacy Handle and lock set.
1 W.C. sign
1 floor mounted door stop
Buffer rubber strips to door stops (to stop door banging)

Pack C:
1.5 pairs hinges with roller bearings
1 door handle set.
1 euro mortice latch/lock
Buffer rubber strips to door stops (to stop door banging)

Pack F:
1.5 pairs hinges with roller bearings (fire rated)
Panic Bars

Fire Legend

Symbol	Description
	New Extra small LED Emergency Light (Ceiling Mounted)
	New Break Glass Call Point
	Proposed Smoke Detectors
FERN	Proposed illuminated LED Running man Fire Escape Sign
	Proposed Fire Alarm Sounder
	Emergency Assistance Pull Cord Switch (Ceiling Mounted)
	Proposed Heat Detectors
FAP	Proposed Fire Alarm Panel
	Proposed Flashing Beacon Fire Alarm

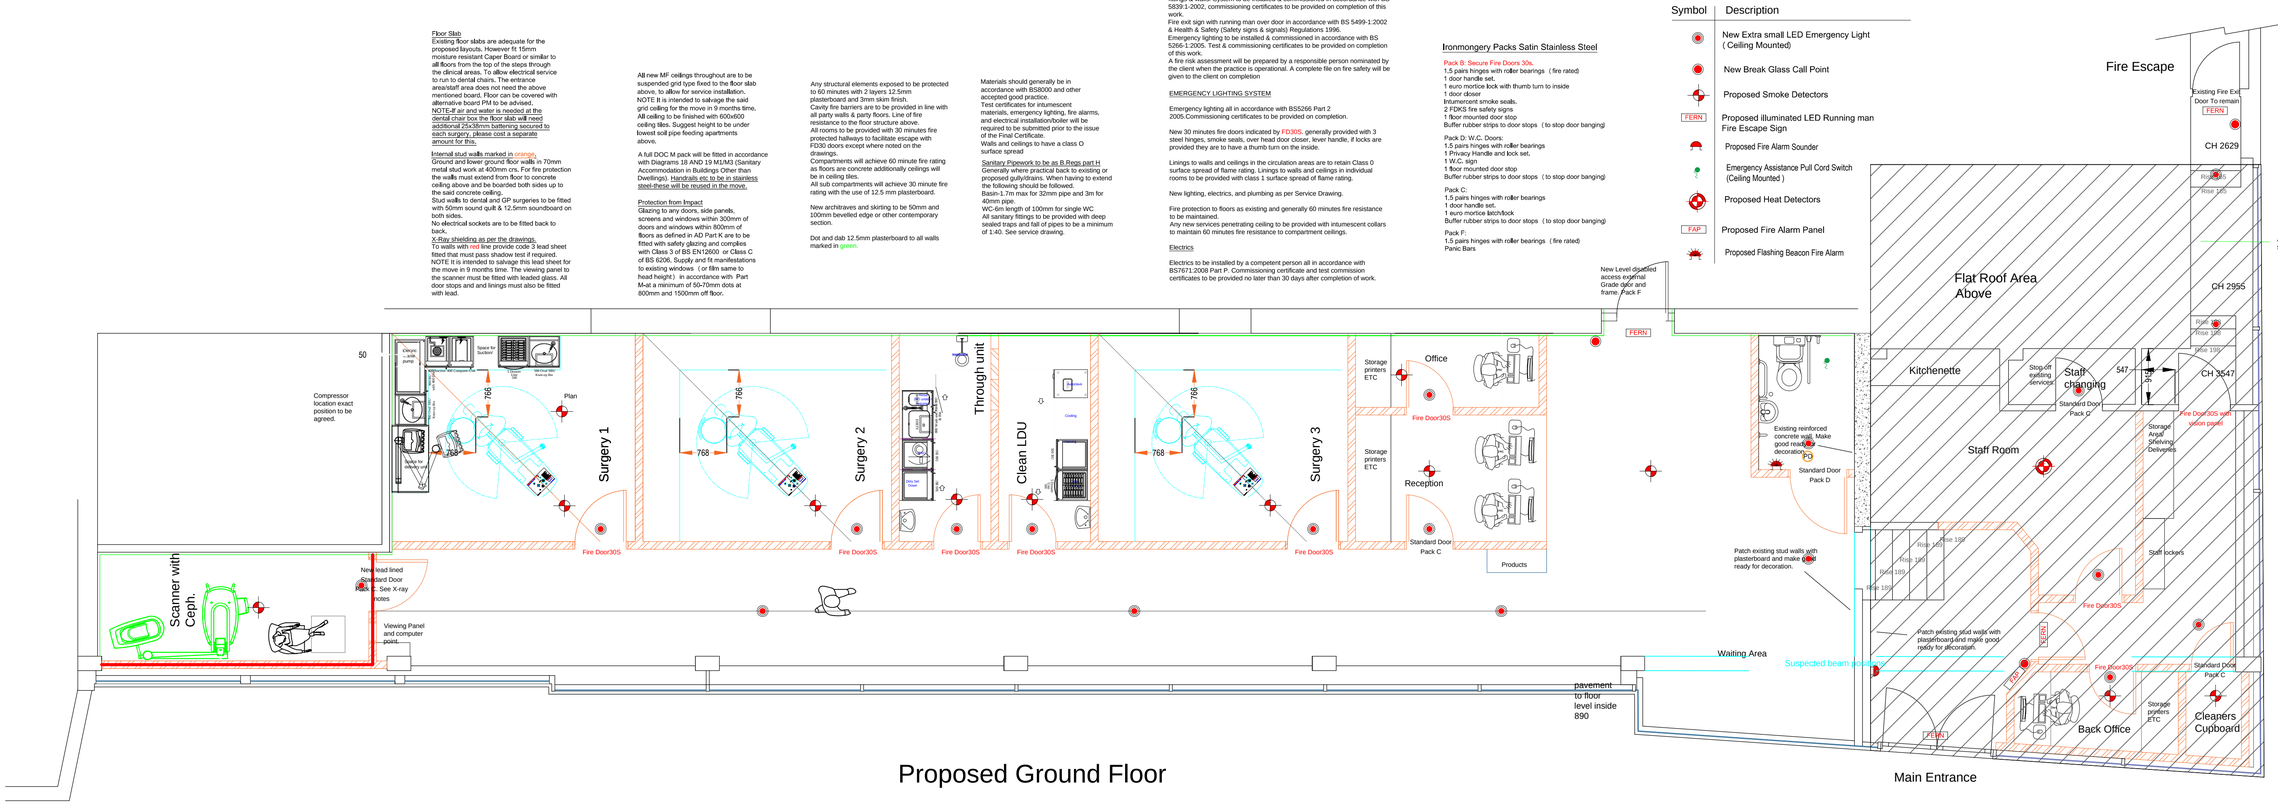

Proposed Ground Floor

Do not scale off drawings always use site measurements.

Revision Register

No.	Description	Date	Approved by
2	Compressor position changed	27-8-2019	

Note:

Archiintelligence
www.archiintelligence.com
Tennyson House
Cambridge Business Park
Cambridge CB4 0WZ
E: info@archiintelligence.com

CLIENT: Sat and Roopa Regarding The New Practice at Lanmore House 370 High Road Wembley London HA9 6AX	DATE: 2-9-2019	Approved by:	DATE:
	SCALE: 1:50 at A1		
DWG NO: SARLH 2-9-19 PFSCD	DRAWN BY: RG		
DWG TITLE: Proposed Fire Strategy/Contruction Drawing			